



# ocean solar

**Bifacial**

## Transparent Backsheet Series

# AOX-144M10RHC 430W-460W

### **HIGH VALUE**

Low LCOE, reduced BOS cost, quick payback.  
More harvest with N-type TOPCon.  
Compatible, efficient container use cuts freight.

### **HIGH POWER UP TO 460W**


23.0% module efficiency, dense interconnect.  
SMBB for trapping, lower resistance, better collection.

### **RELIABLE**

Fewer micro-cracks, PID resistant, endure harsh conditions.  
Mechanical performance up to 5400 Pa positive, 2400 Pa negative.


### **HIGH ENERGY YIELD**

Excellent IAM, low irradiation validated by 3rd party certs.  
Lower degradation: 1% first year, 0.4% annually.  
Lower temperature coefficient (-0.30%).  
Up to 30% extra power gain from back side depending on albedo.

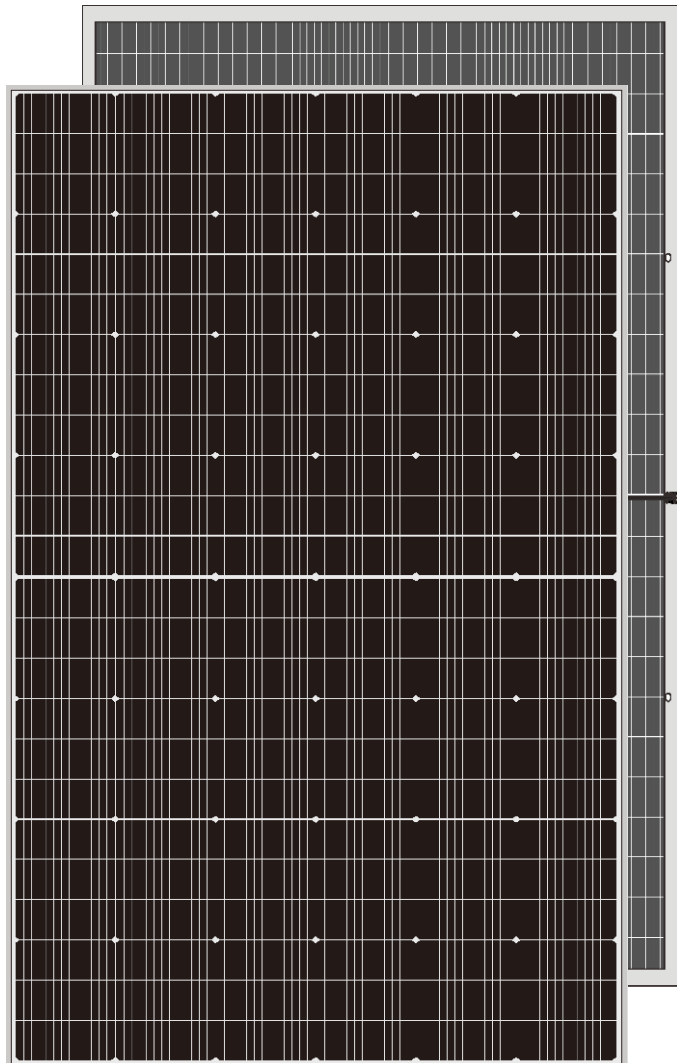

### **N-TopCon Technology**

Enhance efficiency, reduce micro-cracks.

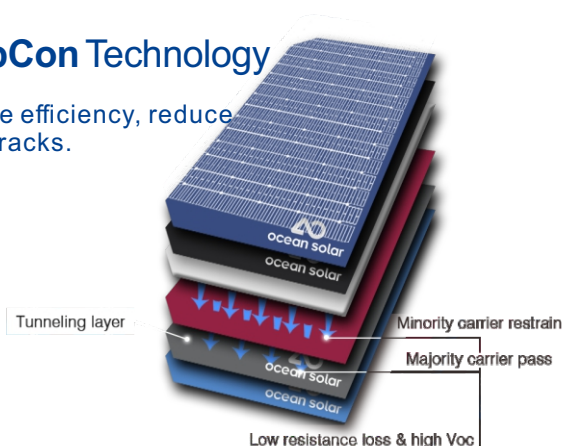


## PRODUCT Certifications



## PRODUCT Warranty





12-year Warranty for Materials and Processing

30-year Warranty for Extra Linear Power Output

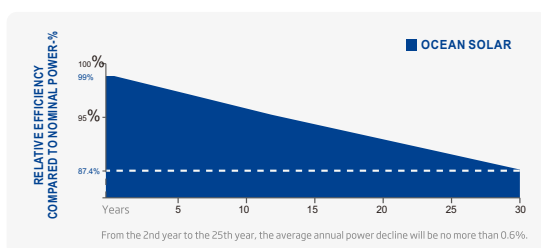

**WORLD SHINES BECAUSE OF YOU**

**High-tech enterprises in China**

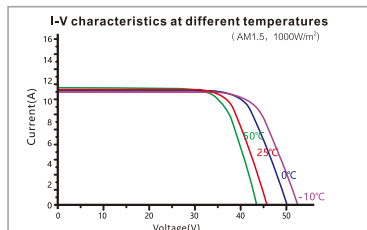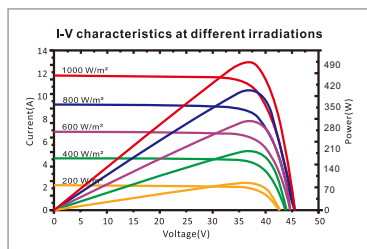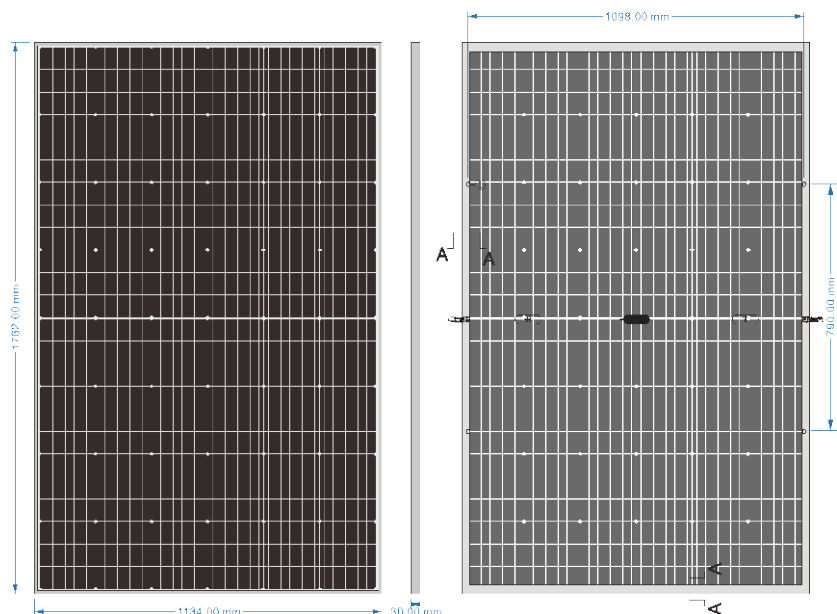

**Electrical Characteristics** STC:AM1.5 1000W/m<sup>2</sup> 25°C NOCT:AM1.5 800W/m<sup>2</sup> 20°C 1m/s Test uncertainty for Pmax:±3%

Module Type	AOX-144M10RHC430W		AOX-144M10RHC435W		AOX-144M10RHC440W		AOX-144M10RHC445W		AOX-144M10RHC450W		AOX-144M10RHC455W		AOX-144M10RHC460W	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(Pmax/W)	430W	327W	435W	330W	440W	334W	445W	337W	450W	340W	455W	344W	460W	347W
Voltage at Maximum Power(Vmp/V)	42.20	39.40	42.40	39.60	42.60	39.80	42.80	40.00	43.00	40.20	43.20	40.40	43.40	40.60
Current at Maximum Power(Imp/A)	10.19	8.30	10.26	8.33	10.33	8.39	10.40	8.43	10.47	8.46	10.54	8.52	10.60	8.55
Open Circuit Voltage(Voc/V)	50.20	47.40	50.40	47.60	50.60	47.80	50.80	48.00	51.00	48.20	51.20	48.40	51.40	48.60
Short Circuit Current(Isc/A)	10.76	8.76	10.83	8.80	10.91	8.86	10.98	8.90	11.06	8.93	11.12	8.99	11.19	9.03
Module Efficiency(%)	21.50%		21.80%		22.00%		22.30%		22.50%		22.80%		23.00%	

**Mechanical Parameters**

Cell Orientation	6*24(144)solar half cells
Junction Box	IP 68 3 diodes
Output Cable	4.0mm <sup>2</sup> solar cable(IEC) (+)≥350mm(-)≥350mm or customized
Front Glass	3.2mm, Anti-reflection Coating, High Transmission, Low Iron, Fully Strengthened Glass
Frame	30mm Anodized Aluminium Alloy
Weight	21kg(+/-0.5kg)
Dimension	1762*1134*30mm
Packaging	36pcs/pallet, 936pcs/40HQ Container

Tip: The number of double-glass modules placed flatly cannot exceed 15 pieces.

**Mechanical Loading**

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

**Bifacial Output-Rearside Power Gain**

	Maximum Power(Pmax)	452W	457W	462W	467W	473W	478W	483W
5%	Module Efficiency(STC)(%)	22.58%	22.89%	23.10%	23.42%	23.63%	23.94%	24.15%
	Maximum Power(Pmax)	473W	479W	484W	490W	495W	501W	506W
10%	Module Efficiency(STC)(%)	23.65%	23.98%	24.20%	24.53%	24.75%	25.08%	25.30%

**Operating Parameters**

Operational Temperature	-40~+85°C
Power Output Tolerance	0~5W
Voc and Isc Tolerance	±3%
Maximum System Voltage	1000/1500VDC(IEC)
Maximum Series Fuse Rating	25A
Nominal Operational Cell Temperature	45±2°C
Protection Class	Class II
Fire Rating	UL type 1 or 2 IEC Class C

**Temperature Ratings(STC)**

Temperature Coefficient of Isc	0.046%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.30%/°C

**Product Warranty**

Warranty for Materials and Processing	12 Years
Warranty for Extra Linear Power Output	30 Years

High-tech enterprises in China



**Ocean Solar**  
E-mail: info@oceansolar.cn  
Web: www.oceansolar.cn

©2024 Ocean Solar All rights reserved.  
Specifications included in this datasheet are subject to change without notice.

