



ocean solar

Dual Glass Series

AOX-132G12RHC
600W-630W

HIGH VALUE

Low LCOE, reduced BOS cost, quick payback.
More harvest with N-type TOPCon.
Compatible, efficient container use cuts freight.

HIGH POWER UP TO 630W


23.3% module efficiency, dense interconnect.
SMBB for trapping, lower resistance, better collection.

RELIABLE

Fewer micro-cracks, PID resistant, endure harsh conditions.
Mechanical performance up to 5400 Pa positive, 2400 Pa negative.

HIGH ENERGY YIELD

Excellent IAM, low irradiation validated by 3rd party certs.
Lower degradation: 1% first year, 0.4% annually.
Lower temperature coefficient (-0.30%).
Up to 30% extra power gain from back side depending on albedo.

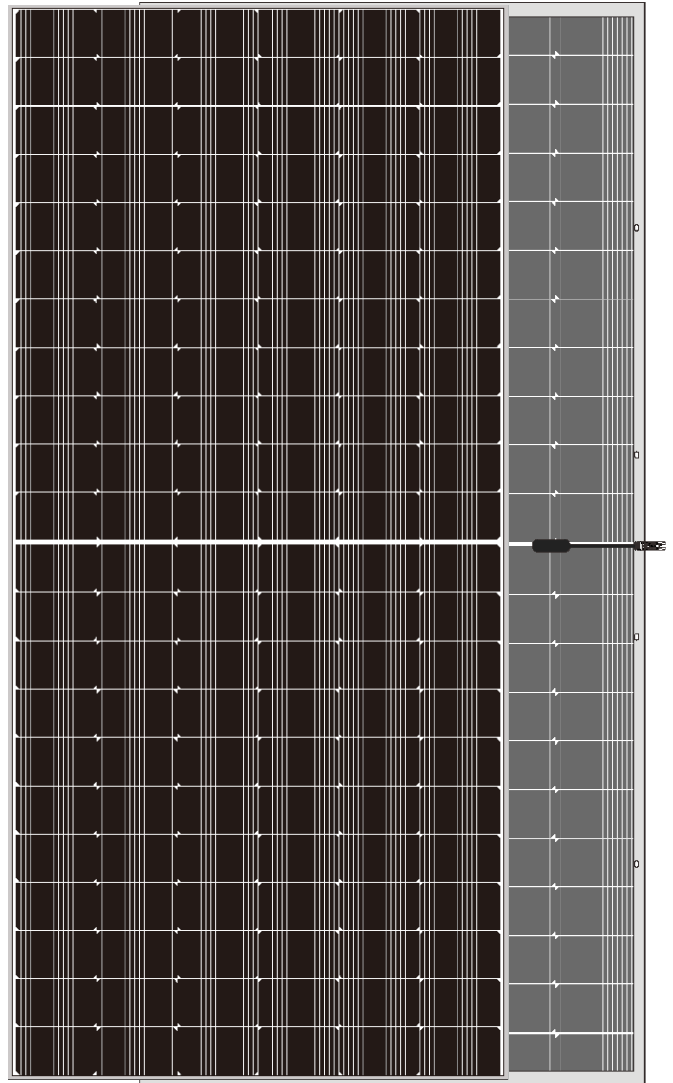

N-TopCon Technology

Enhance efficiency, reduce micro-cracks.








PRODUCT Certifications



PRODUCT Warranty

12-year Warranty for Materials and Processing
25-year Warranty for Extra Linear Power Output

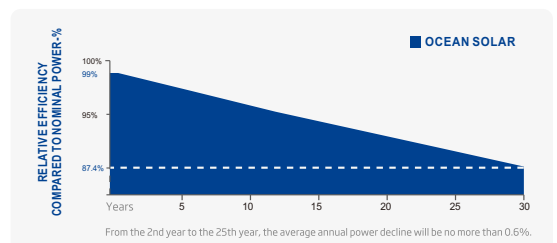

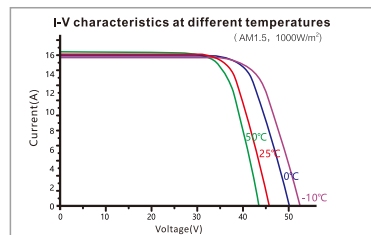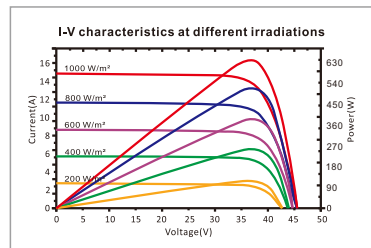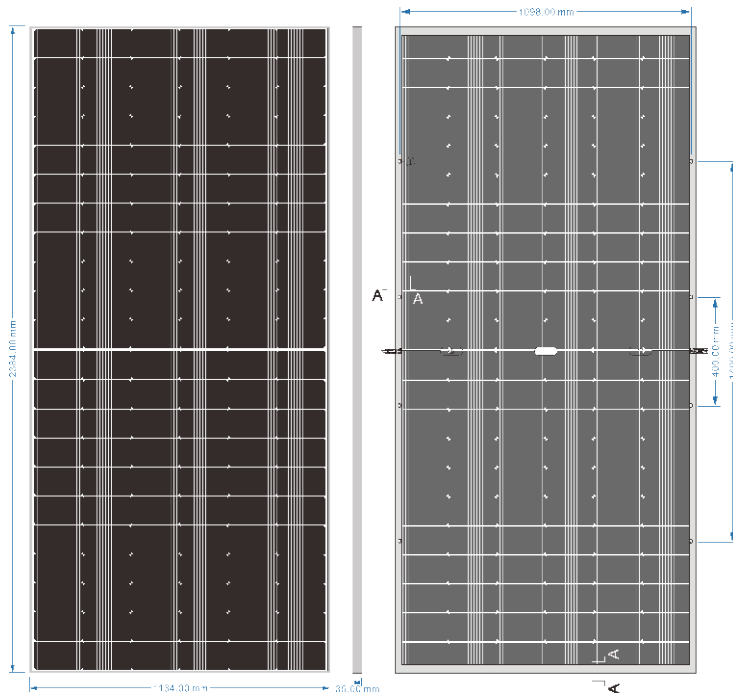

Electrical Characteristics STC:AM1.5 1000W/m² 25°C NOCT:AM1.5 800W/m² 20°C 1m/s Test uncertainty for Pmax:±3%

Module Type	AOX-132G12RHC600W		AOX-132G12RHC605W		AOX-132G12RHC610W		AOX-132G12RHC615W		AOX-132G12RHC620W		AOX-132G12RHC625W		AOX-132G12RHC630W	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(Pmax/W)	600W	445W	605W	459W	610W	463W	615W	467W	620W	471W	625W	475W	630W	479W
Voltage at Maximum Power(Vmp/V)	40.30	37.80	40.50	38.00	40.70	38.20	40.90	38.40	41.10	38.60	41.30	38.80	41.50	39.00
Current at Maximum Power(Imp/A)	14.89	12.04	14.94	12.08	14.99	12.12	15.04	12.16	15.09	12.20	15.14	12.24	15.19	12.28
Open Circuit Voltage(Voc/V)	48.40	45.80	48.60	46.00	48.80	46.20	49.00	46.40	49.20	46.60	49.40	46.80	49.60	47.00
Short Circuit Current(Isc/A)	15.72	12.71	15.78	12.76	15.83	12.80	15.88	12.84	15.94	12.89	15.98	12.93	16.03	12.97
Module Efficiency(%)	22.10%		22.30%		22.50%		22.70%		22.90%		23.00%		23.30%	

Mechanical Parameters

Cell Orientation	6*22(132)solar half cells
Junction Box	IP 68 3 diodes
Output Cable	4.0mm² solar cable(IEC) (+)≥350mm(-)≥350mm or customized
Front Glass	2.0mm, Anti-reflection Coating
Back Glass	2.0mm, Heat Strengthened Glass
Frame	35mm Anodized Aluminium Alloy
Weight	32.5kg(+/-0.5kg)
Dimension	2384*1134*35mm
Packaging	31pcs/pallet, 620pcs/40HQ Container

Tip: The number of double-glass modules placed flatly cannot exceed 15 pieces.

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Bifacial Output-Rearside Power Gain

5%	Maximum Power(Pmax)	630W	636W	641W	646W	651W	656W	662W
Module Efficiency(STC(%))	23.21%	23.42%	23.63%	23.84%	24.05%	24.15%	24.47%	

10%	Maximum Power(Pmax)	660W	666W	671W	677W	682W	688W	693W
Module Efficiency(STC(%))	24.31%	24.53%	24.75%	24.97%	25.19%	25.30%	25.63%	

Operating Parameters

Operational Temperature	-40~+85°C
Power Output Tolerance	0~5W
Voc and Isc Tolerance	±3%
Maximum System Voltage	1000/1500VDC(IEC)
Maximum Series Fuse Rating	25A
Nominal Operational Cell Temperature	45±2°C
Protection Class	Class II
Fire Rating	UL type 1 or 2 IEC Class C

Temperature Ratings(STC)

Temperature Coefficient of Isc	0.046%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.30%/°C

Product Warranty

Warranty for Materials and Processing	12 Years
Warranty for Extra Linear Power Output	30 Years

High-tech enterprises in China



Ocean Solar
E-mail: info@oceansolar.cn
Web: www.oceansolar.cn

©2024 Ocean Solar All rights reserved.
Specifications included in this datasheet are subject to change without notice.

